


KINNEY AUTOMATIC SELF-CLEANING STRAINER

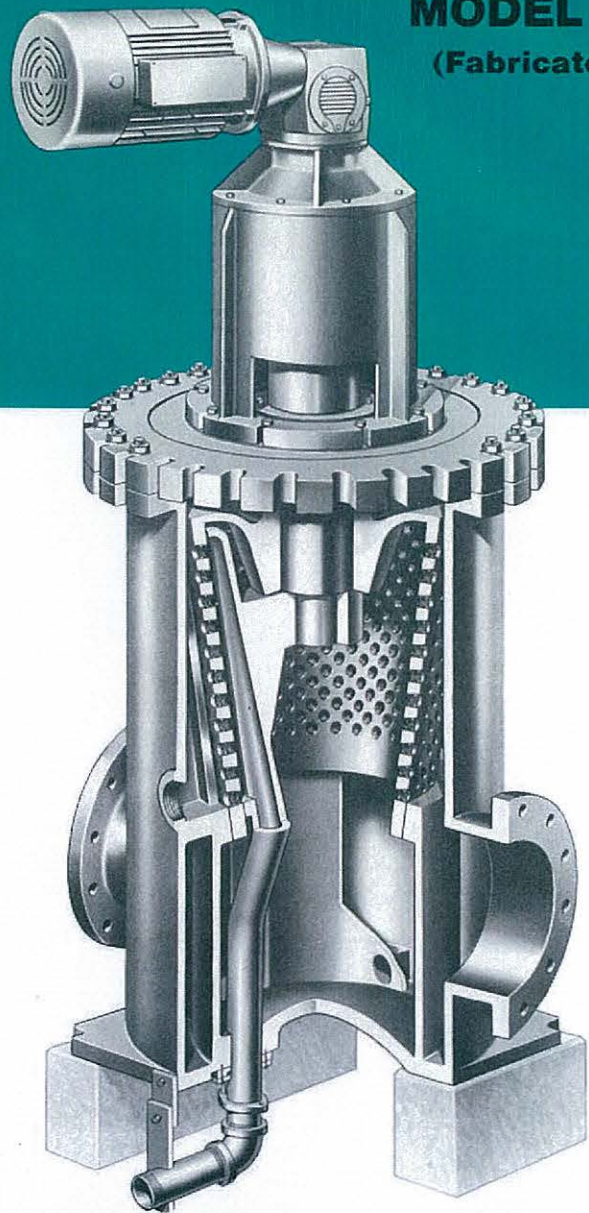

APPLICATIONS

Designed for continuous removal of suspended particles from all types of liquids. Applications are in industrial plants using river, lake, well, or sea water for cooling, descaling, bearing lubrication, spraying, quenching, and similar purposes. Pipe-line sizes: 6"-42" or larger upon application.

Liquids other than water, such as chemicals, acids, white water (paper mills), sewage, and ammonia flushing liquor (coke plants) can also be effectively strained.

INSTALLATION

Used when working pressure is low. The strainer is compact—with small face-to-face, width, and height dimensions.

DESIGN

The strainer consists of a cylindrical drum with a number of drilled and threaded holes containing one of many types of straining media. The drum is supported on a rotating shaft fitted with bearings and is contained in a body having a vertical backwash slot opening. A pressure backwash shoe is inserted inside the drum, directly opposite the backwash slot.

OPERATION

The liquid to be strained enters the inlet connection located in the lower portion of the body and flows around the outer surface of the drum. The suspended particles are retained in the media pockets and the clean liquid passes through the media to the inside and bottom opening of the drum—leaving the body at the outlet connection located diametrically opposite the inlet.

BACKWASH

High pressure liquid from the discharge side of the pump or from some other source is diverted to the backwash shoe. As each row of straining media passes between the backwash shoe and the backwash slot, the high pressure liquid flushes the suspended particles from the media. The amount of high pressure liquid needed to effect proper backflushing is low and will vary, depending on the amount of suspended particles in the liquid being strained. The inlet and outlet valves are kept open partially in order to obtain a minimum pressure drop across the strainer with low wastage. Periodically, these valves should be opened all the way to obtain a more thorough cleaning action. The backwash piping should discharge into an open funnel immediately after the backwash outlet valve.

AUTOMATIC BACKWASH CONTROL

In lieu of manually operated backwash valves, an automatic control can be furnished to permit intermittent backflushing. This control consists of motor or pneumatic cylinder operated ball valves (one at the backwash inlet and one at the backwash outlet), actuated by a timer.

ADJUSTMENT AND SHEARING ACTION



The clearance between the backwash slot and the drum and the clearance between the drum and the backwash shoe is equal to or smaller than the opening presented in the media. Adjustment of the clearance between the backwash slot and the drum is accomplished by two locknuts on the threaded part of the top section of the shaft. The clearance between the drum and the backwash shoe is adjusted at the bottom of the backwash shoe.

The backwash slot contains a knife-like edge which enables the strainer to shear debris such as wood, shells, fish, and other suspended materials which may extend beyond the surface of the drum—with no resultant damage to the drum, straining media, or drive unit.

INSPECTION

The Kinney strainer eliminates troublesome disassembly by providing an opening in the side of the strainer body. To inspect the straining media, simply remove the cover and manually rotate the drum (via a special shaft in the drive unit). As each row of media passes the inspection opening, easy access to the media is achieved.

MODEL AP
Fabricated

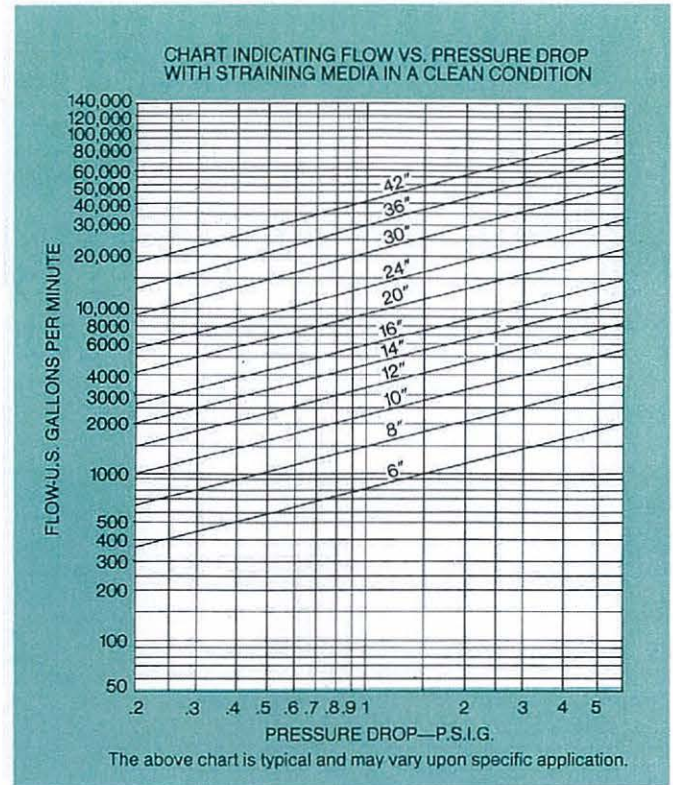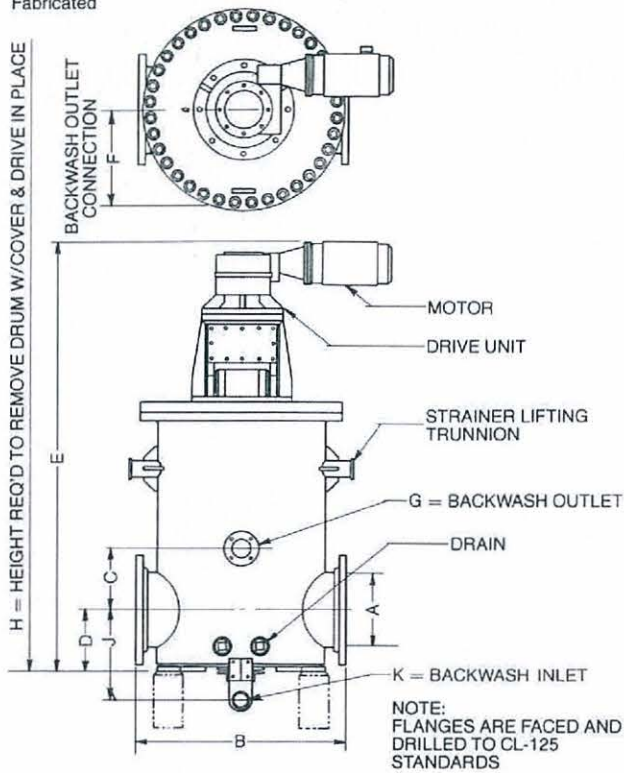

MODEL AP FABRICATED										
STRAINER SIZE-A	DIMENSIONS (INCHES)									APPROX. SHIP. WT. LBS.
	B	C	D	E	F	G	H	J	K	
6	21	7	7	49½	10½	2 ▲	79¼	12¾	1½	1,190
8	26	8	8¼	59¼	12½	2 ▲	97	13¾	1½	1,575
10	31	9¾	9½	62¾	16¼	3 ▲	105½	15¾	2	2,430
12	36	11½	11	78¼	19	3 ▲	131¾	17¾	2½	3,575
14	41	12½	12	81½	19	4	137½	18¾	2½	4,360
16	45	13¼	13¼	92¾ ₁₆	20¾	3*	158¾	20½	3	6,475
20	52	15½	15¼	101¾ ₁₆	24¼	4*	177¾	23¾	4	8,853
24	62	17½	17½	116¾	28½	4*	217½	25¾	4	12,500
30	72	23½	21½	130½	32¾	6*	230½	36¼	6	16,650
36	86	25½	25	153¾	40	6*	271½	39	6	26,850
42	93	30½	31½	196¾	42¾	6*	342½	45½	6	34,250

* Two Backwash openings ▲ Pipe tap Do not use for construction—certified prints will be furnished

CONSTRUCTION				
PART	STANDARD	SEA WATER	WHITE WATER	AMMONIACAL LIQUOR
BODY	Fabricated Steel (Epoxy Lined)	Fabricated Steel (Epoxy Lined) or Stainless Steel	Stainless Steel	Fabricated Steel
DRUM	Cast Iron	Ni-Resist	Stainless Steel	Cast Iron
MEDIA	As Specified	As Specified	As Specified	As Specified
MEDIA RETAINERS	Delrin	Stainless Steel	Delrin	Stainless Steel
SHAFT	Steel	Stainless Steel	Stainless Steel	Stainless Steel
BACKWASH SHOE (Model AP only)	Cast Iron	Ni-Resist	Stainless Steel	Cast Iron



S. P. KINNEY ENGINEERS, INC.
143 FIRST AVE. • CARNEGIE, PENNSYLVANIA 15106
PHONE: AREA CODE (412) 276-4600